



Premium Range **BRIGHT**

Experience the European difference

BP8630

Swing arm tyre changer with helper arm



Model: BP8630


Product: Swing arm tyre changer with helper arm

Description: The BP8630 Swing Arm Tyre Changer with Helper Arm is a versatile, heavy-duty machine designed for handling a wide range of tyre sizes. Its swing arm design allows for easy positioning of the mounting head, and the integrated helper arm assists with the installation and removal of low-profile and run-flat tyres. This tyre changer is equipped with a robust clamping system and features a user-friendly control panel, making it ideal for professional workshops. It enhances efficiency and reduces the risk of tyre damage during mounting and demounting

Features:	Benefits:
Designed and Engineered in Europe	Italian software
Manual Bead Breaker	The manually operated bead breaker allows precise control for breaking the tyre bead away from the rim, reducing the risk of damage.
CVT System (Continuously Variable Transmission)	Ensures smooth and consistent operation, offering precise control over speed during tyre mounting and demounting processes. Heavy-Duty Construction: Built to withstand rigorous use in commercial workshops, ensuring durability and long-term performance.
Wide Clamping Range	Suitable for a variety of tyre sizes, accommodating passenger cars, light trucks, and mor
Self-Centering Turntable	Keeps the wheel securely positioned during operation for accurate and efficient tyre handling.
User-Friendly Controls	Simple to operate, making it ideal for technicians of varying skill levels.
Non-Slip Jaw Clamp	Provide a firm grip on the rim to ensure stability throughout the tyre changing process. Adjustable Mounting Head: Offers flexibility to handle different rim profiles and sizes with ease.
	Efficient operation: The CVT system allows for smooth speed adjustments during the process, enhancing efficiency by adapting to different tyre types and ensuring consistent performance.
	Versatility: With its wide clamping range and adjustable mounting head, the BP8630 can handle various types of tyres, including standard, low-profile, and specialty tyres.
	Durability: Designed for heavy-duty use, the BP8630's robust construction ensures it can handle high volumes of work in a busy workshop environment without compromising on performance.

	Operator Safety: Non-slip clamps and the manual bead breaker ensure the tyre is securely held in place, reducing the risk of slips or errors that could result in injury.
	Cost-effective: The manual operation and durable design make this tyre changer a long-lasting investment with low maintenance costs.
Training available	Technicians can be professionally trained to use the machine and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults and can be replaced if required.

Technical information	
Inside clamping range	12" - 28"
Outside clamping range	14" - 30"
Rim width	15" (380mm)
Max Wheel diameter	49" (1250mm)
Working pressure	8 - 10 bar
Rated torque	1200N.m
Power supply	220V
Motor power	0.85KW
Rotation per minute	0 - 13 rpm

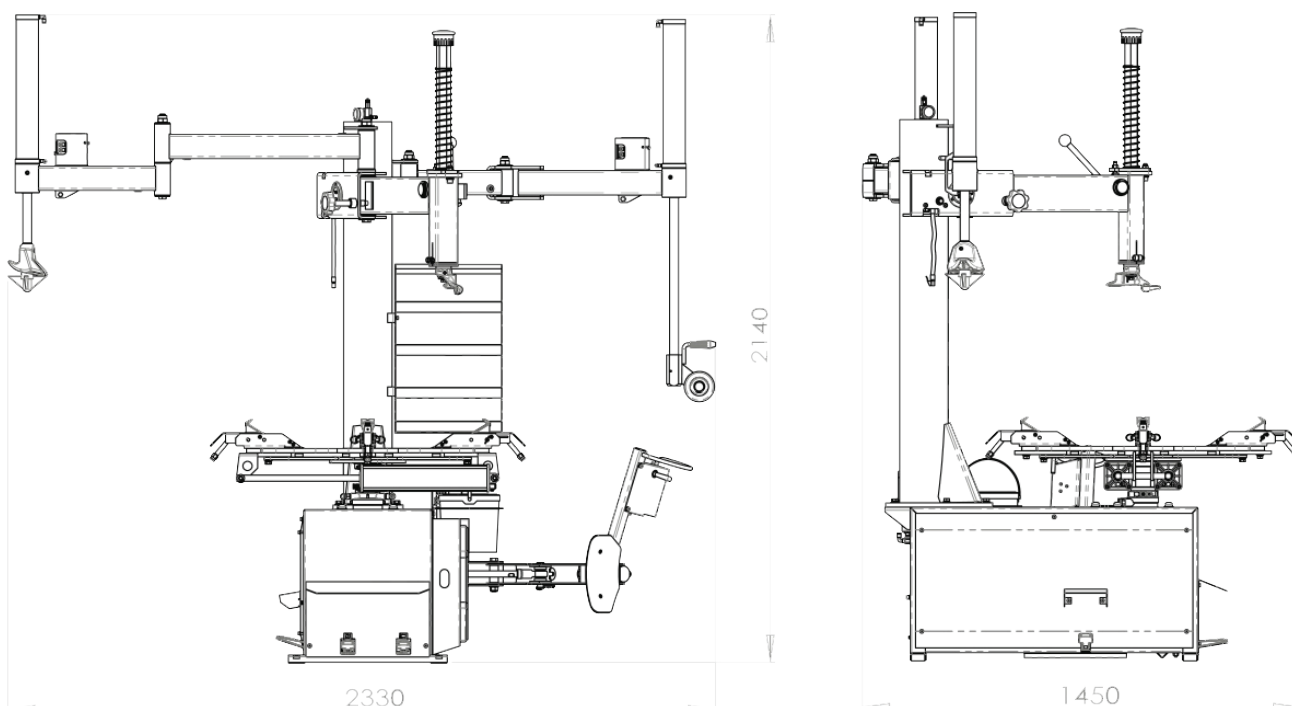

Colors and designs may differ

10 Keymax Park, 1006 Ergon road, Lyttelton Manor, Gauteng