

Industrial



S60-2J

60/40 ton air-hydraulic trolley jack
(2 stage)



Model: S60-2J


Product: 60/40 ton air-hydraulic trolley jack (2 stage)

Description: High-quality pneumatic jack designed for lifting heavy loads, making it ideal for use in automotive workshops and industrial settings. It is engineered with a focus on durability and performance.

Features	Benefits
High Lifting Capacity	The S60-2J is capable of lifting heavy loads efficiently, ideal for large vehicles and equipment
Pneumatic Operation	Durable Construction Operated using compressed air, making the lifting process faster and more powerful compared to manual jacks
Slow down valve	Which is a crucial safety feature that controls the lowering speed of the jack.
Hard chrome plated both internal & external cylinder	This enhances the durability and performance of the jack in several ways: ▪ Corrosion resistance ▪ Increased durability ▪ Smooth operation ▪ Enhanced strength This feature ensures the S60-2J maintains reliability and functionality over time, even with regular heavy lifting tasks.
XTP industry sealing (double sealing function)	Enhances the jack's performance and reliability, particularly in heavy-duty applications: ▪ Enhanced leak prevention ▪ Extended service life ▪ Improved pressure retention ▪ Higher load capacity The XTP industry sealing system contributes to the jack's durability and efficiency, especially in industrial and automotive settings where high-performance equipment is essential
Safety overload valve	Equipped with a safety overload valve, which plays a crucial role in ensuring the safety and longevity of the equipment during heavy-duty lifting operations.
Self-return switch for safe working	Designed with a self-return switch, enhancing safety during operation. This feature is particularly beneficial in professional settings where heavy lifting is common.
Anti oil-back system	Which is essential for ensuring smooth and safe operation during lifting tasks.
	Built from high-strength materials to withstand harsh working environments and repeated use, ensuring longevity

Safety Mechanism	Features automatic overload protection to prevent damage to the jack or the lifted load, enhancing user safety
Compact and Portable Design	Despite its heavy-duty capabilities, the S60-2J is compact, making it easier to store and transport
	Increased Efficiency: The pneumatic lifting mechanism saves time and reduces operator fatigue, allowing for quicker and more frequent lifting tasks
	Enhanced Safety: Built-in safety features protect both the equipment and the operator from overloading, ensuring safe operations during heavy lifting
	Durability: The robust design ensures that the jack can handle demanding tasks for a long time, reducing the need for frequent replacements
	Versatility: Suitable for a wide range of applications, including automotive repair, heavy equipment maintenance, and other industrial lifting needs
Training available	Technicians can be professionally trained to use the machine and get the maximum benefit from it.
1 year warranty	The machine will be repaired if there are any factory faults and can be replaced if required.
Spares available	Should you have a breakdown you will not have to wait for your equipment to be repaired. If there is anything we don't have, we fly it in directly from the Suppliers.

Technical information	
Working air pressure	0.9 - 1.2 Mpa
Min height	220 mm
Max height	580 mm
Lifting height	60t: 121 mm 40t: 119 mm
Extension height	75 mm + 45 mm

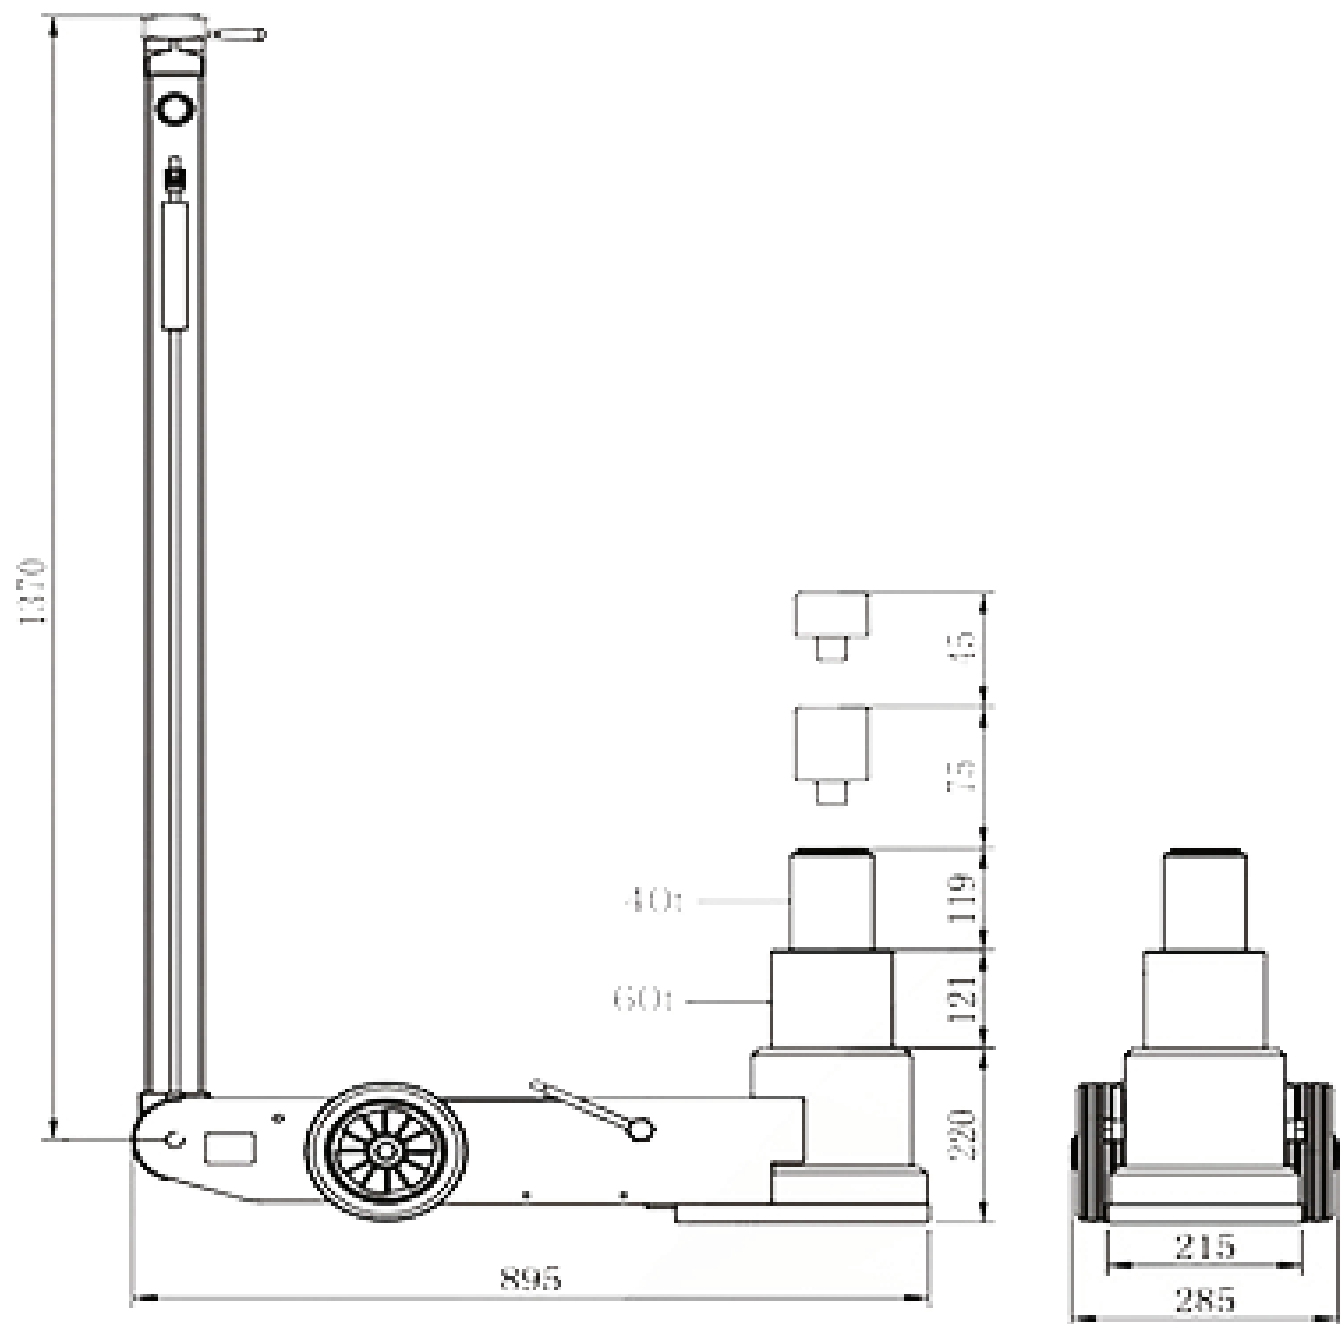

Colors and designs may differ

10 Keymax Park, 1006 Ergon road, Lyttelon Manor, Gauteng